TILE REDI®
LUXSHOWER™ PAN

MODEL
DR3636CSTPW

(Not to scale)

36” x 36” Shower Pan

OD: 36" x 36 (914 mm x 914 mm)
Threshold Height: 4 1/4" (108 mm)
Rough Opening: 36 1/4" x 36 1/4" (921 mm x 921mm)
Shower Pan Weight: 82lbs. (37.2kg.)

The LuxShower DR3636CSTPW with a 4 1/4” threshold allows for a full threshold and maximum water retention. The option to add an optional factory applied patented membrane system to the shower pan is perfect for eliminating the risk of leakage at the most vulnerable point between the threshold of the shower pan and the flooring that adjoins, allowing the pan to be tied into a tile or flooring system. LuxShower shower pans meet and exceed the F462 COF testing while being very easy to clean and the 1” water dams allow any wall system to be securely added. The grid system on the bottom of the pan is built in for maximum structure and integrity. The DR3636CSTPW is perfect for commercial applications for maximum durability. LuxShower shower pans carry a 10 year factory warranty when installed in accordance to the LuxShower installation instructions.

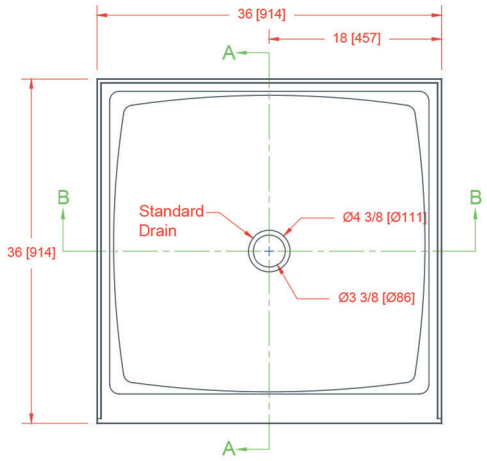

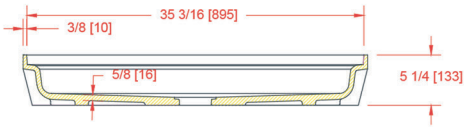

SECTION B-B

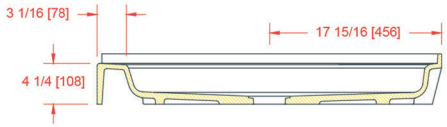

SECTION A-A

Drain Layout

Center of Drain is 18 1/8" from back stud wall by 18 1/8" from Right and Left stud wall.
A 6" core is recommended for drain clearance*

**Check all building and fire codes prior to installation*



Home Innovation LAB CERTIFIED™
Certified by:
Home Innovation Lab
(NAHB):ANSI Z124.2

Toll Free: 800.232.6156
Tel: 954.323.0125
Fax: 954.344.8064
techsupport@tileredi.com
www.tileredi.com

tile redi

2024.09.11

© 2024 TILE REDI USA, LLC