TILE REDI®
LUXSHOWER™ PAN

MODEL
DR3762CBFPW


(Not to scale)


62 1/2" x 36 3/4" Roll-in Shower Pan

Center Roll-in Drain


OD: 62 1/2" x 36 3/4" (1588 mm x 933 mm)
Threshold Height: 0" (0 mm) with 1 1/8" Recess (29mm)
Rough Opening: 62 3/4" x 36 7/8" (1594 mm x 937mm)
Shower Pan Weight: 137lbs. (62.2kg)

The LuxShower DR3762CBFPW roll-in shower pan is suitable for a center drain ADA configuration. Feature at the front of the pan maximizes water retention, while complying with ADA elevation change requirements for a roll-in pan. The option to add an optional factory applied patented membrane system to the shower pan is perfect for eliminating the risk of leakage at the most vulnerable point between the threshold of the shower pan and the flooring that adjoins, allowing the pan to be tied into a tile or flooring system. LuxShower shower pans meet and exceed the F462 COF testing while being very easy to clean and the 1" water dams allow any wall system to be securely added. The grid system on the bottom of the pan is built in for maximum structure and integrity. The DR3762CBFPW is perfect for commercial applications for maximum durability. LuxShower shower pans carry a 10 year factory warranty when installed in accordance to the LuxShower installation instructions.

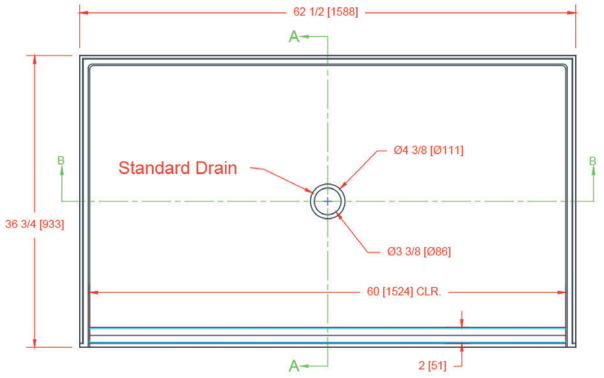

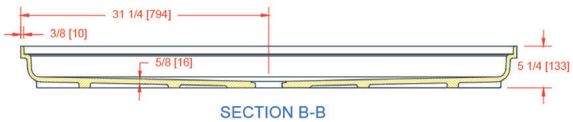

SECTION B-B




SECTION A-A

Drain Layout

Center of Drain is 18 1/2" [470mm] from back stud wall
by 31 3/8" [797mm] from Left stud wall.
A 6" core is recommended for drain clearance*

Check all building and fire codes prior to installation

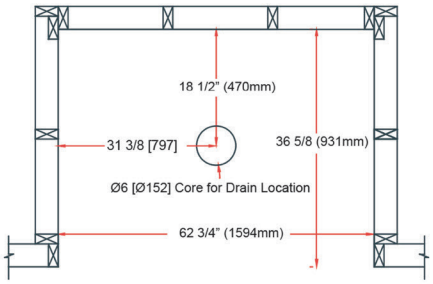

Home Innovation LAB CERTIFIED™

Certified by:
Home Innovation Lab
(NAHB):ANSI Z124.2

Toll Free: 800.232.6156
Tel: 954.323.0125
Fax: 954.344.8064
techsupport@tileredi.com
www.tileredi.com

tile redi

2024.09.11

© 2024 TILE REDI USA, LLC